


Lifting capacity

Excavator equipped with ROPS/FOPS and rubber tracks
(without quick coupler and without bucket)

r : Reach from swing center line : mm (in)
h : Lift point height : mm (in)
w : Lifting capacity : kg (lbs)
P : Lift point

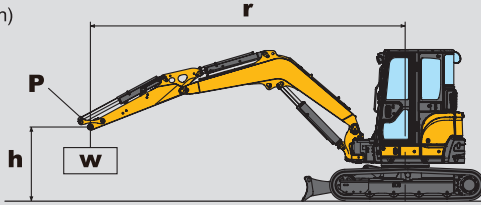

- The rated lifting capacities that are indicated below are based on ISO 10567 and do not exceed 87% of the excavator's hydraulic lifting capacity or 75% of its static tilt load (tipping load) capacity.
- The following operating criteria are also applicable to the calculation of these maximum loads;
 - The "Lift point" is the location of the front point on the arm
 - The three indicated machine position are : (i) arm over the front end (blade down), (ii) arm over the front end (blade up), and (iii) arm over the side (blade up).
- The weight of the excavator's bucket, hook, sling and other lifting accessories have been taken into consideration when calculating these maximum loads.

Vi050-6B

LIFT POINT HEIGHT h : mm (in)	r : REACH mm (in)											
	RATED LIFT CAPACITY OVER END BLADE DOWN : kg (lbs)				RATED LIFT CAPACITY OVER END BLADE UP : kg (lbs)				RATED LIFT CAPACITY OVER SIDE BLADE UP : kg (lbs)			
	MAX	4000 (157.5)	3000 (118.1)	2000 (78.7)	MAX	4000 (157.5)	3000 (118.1)	2000 (78.7)	MAX	4000 (157.5)	3000 (118.1)	2000 (78.7)
4000 (157.5)	* 1090 (2403)				* 1040 (2292)				800 (1763)			
3000 (118.1)	* 1070 (2358)	* 1050 (2314)			700 (1543)	830 (1829)			600 (1322)	720 (1587)		
2000 (78.7)	* 1100 (2425)	* 1200 (2645)	* 1500 (3306)		590 (1300)	780 (1719)	* 1430 (3152)		520 (1146)	720 (1587)	1100 (2425)	
1000 (39.4)	* 1150 (2535)	* 1380 (3042)	* 1980 (4365)		570 (1256)	760 (1675)	1150 (2535)		510 (1124)	680 (1499)	1000 (2204)	
0 (Ground)	* 1170 (2579)	* 1490 (3284)	* 2080 (4585)	* 2930 (6459)	590 (1300)	720 (1587)	1070 (2358)	1890 (4166)	500 (1102)	620 (1366)	920 (2028)	1520 (3351)
-1000 (-39.4)	* 1210 (2667)	* 1320 (2910)	* 1920 (4232)	* 2900 (6393)	690 (1521)	720 (1587)	1090 (2403)	1990 (4387)	600 (1322)	610 (1344)	900 (1984)	1620 (3571)
-2000 (-78.7)	* 1150 (2535)		* 1340 (2954)		* 1180 (2601)		1120 (2469)		880 (1940)		960 (2116)	

Vi055-6B

LIFT POINT HEIGHT h : mm (in)	r : REACH mm (in)											
	RATED LIFT CAPACITY OVER END BLADE DOWN : kg (lbs)				RATED LIFT CAPACITY OVER END BLADE UP : kg (lbs)				RATED LIFT CAPACITY OVER SIDE BLADE UP : kg (lbs)			
	MAX	4000 (157.5)	3000 (118.1)	2000 (78.7)	MAX	4000 (157.5)	3000 (118.1)	2000 (78.7)	MAX	4000 (157.5)	3000 (118.1)	2000 (78.7)
4000 (157.5)	* 1140 (2513)	* 1100 (2425)			* 1100 (2425)	* 1070 (2358)			860 (1895)	* 1090 (2403)		
3000 (118.1)	* 1140 (2513)	* 1170 (2579)			700 (1543)	* 1130 (2491)			690 (1521)	* 1120 (2469)		
2000 (78.7)	* 1160 (2557)	* 1350 (2976)	* 1780 (3924)		660 (1455)	1000 (2204)	* 1720 (3791)		590 (1300)	890 (1962)	* 1640 (3615)	
1000 39.4 (39.4)	* 1200 (2645)	* 1560 (3439)	* 2270 (5004)		630 (1388)	950 (2094)	1420 (3130)		560 (1234)	850 (1873)	1250 (2755)	
0 (Ground)	* 1230 (2711)	* 1680 (3681)	* 2420 (5335)	* 3160 (6966)	670 (1477)	890 (1962)	1350 (2976)	2160 (4761)	590 (1300)	790 (1741)	1170 (2579)	1890 (4166)
-1000 (-39.4)	* 1260 (2777)	* 1600 (3527)	* 2310 (5092)	* 3260 (7187)	730 (1609)	880 (1940)	1320 (2910)	2230 (4916)	660 (1455)	810 (1785)	1180 (2601)	2030 (4475)
-2000 (-78.7)	* 1190 (2623)		* 1170 (2592)		1000 (2204)		1330 (2932)		940 (2072)		1190 (2623)	

Note : The maximum loads marked with an asterisk (*) were limited by the Excavator's hydraulic lifting capacity rather than by its static tilt load (tipping load) capacity.

Standard equipment

- Blade
- Boom swing function
- Cylinder cover (boom, arm, bucket, blade)
- Rubber or Steel tracks
- Back mirror
- Work light on canopy
- ROPS / FOPS Canopy, Cabin
- Windshield washer (cabin)
- Lock lever
- LCD monitor
- Joystick pilot controls
- Arm rests
- Suspension and reclining seat
- Seat belt
- P.T.O switch
- Engine accelerator knob
- Auto deceleration
- Eco mode
- Engine stop switch
- External power socket (12V)
- Cup holder
- Ash tray (cabin)
- Floor mats
- Evacuation hammer (cabin)

Please note that the standard equipment may vary from this list. Consult your Yanmar dealer for confirmation

YANMAR CONSTRUCTION EQUIPMENT CO.,LTD.

OVERSEAS SALES DEPT.
MARKETING & SALES DEPT.

1717-1 Kumano, Chikugo, Fukuoka 833-0055, JAPAN
TEL +81-942-53-5465 FAX +81-942-53-5132

yanmar.com

All data subject to change without notice.



YANMAR

TRUE ZERO TAIL SWING MINI EXCAVATOR

Vi050-6B / **Vi055-6B**

[Gross] 28.1kW

[Gross] 33.4kW



DESIGNED FOR PROFESSIONAL OPERATORS

Everything a professional operator needs in a mini excavator

Vi050-6B and Vi055-6B are exceptionally designed for professional operators. These 2 models will impress users with their superior fuel efficiency, work performance, comfort, durability and serviceability.



TRUE ZERO TAIL SWING MINI EXCAVATOR


Vi050-6B 28.1kW **Vi055-6B** 33.4kW

SAVE TIME AND BE MORE PRODUCTIVE

ViO50-6B and ViO55-6B, born to deliver top performance

Clean diesel engine

These 2 models are powered by Yanmar TNV series diesel engines, equipped with the latest electronically controlled direct injection technologies designed for clean emission and powerful output.

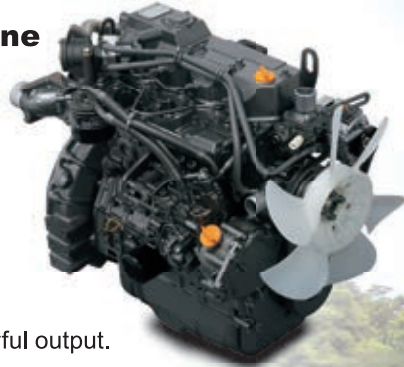

ViO50-6B **4TNV88** ViO55-6B **4TNV84T**

28.1 kW / 2200rpm **33.4 kW** / 2200rpm


Fuel efficiency

Fuel efficiency has improved due to the excellently matched hydraulic system combined with the new features of Eco mode and Auto deceleration, making them the most fuel efficient excavators in their class.

Electronically controlled engine

More efficient hydraulics

30% better fuel economy over previous models

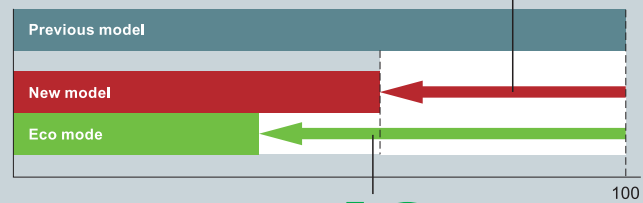

Eco mode is used 40% down previous models

Eco mode

Switching to Eco mode helps reduce fuel consumption significantly.




Auto deceleration

If the operating levers have been in neutral for more than 4 seconds, the engine will automatically drop back to idle, which lowers noise, emissions and fuel consumption.

Productivity

The new engines, coupled with a more powerful hydraulic pump, allow these 2 models to perform smoothly and efficiently. Work performance has increased by 10%.

Amount of work per hour *standard specifications

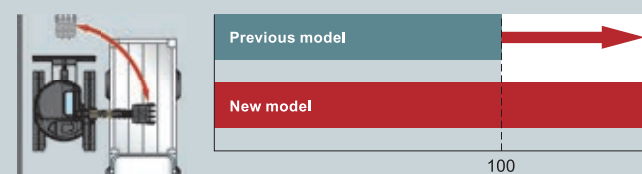

Work condition : Digging and dumping work **10% increase**


Lifting capacity

ViO50-6B and ViO55-6B have the lifting power of a conventional type excavator, thanks to their ingenious design and excellently balanced weight distribution.

Lifting capacity over front *standard specifications




Lifting capacity over side *standard specifications

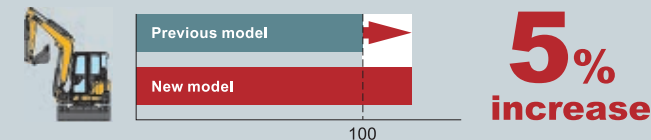

True zero tail swing

Yanmar pioneered the concept of a true zero tail swing mini excavator which will operate with no overhang on the tightest of job sites.




Heat balance

The larger radiator and enhanced hydraulic oil cooling system ensure top performance regardless of ambient temperatures.

Radiator **10% increase** | Oil cooler **10% increase**

Yanmar original quick coupler (option)

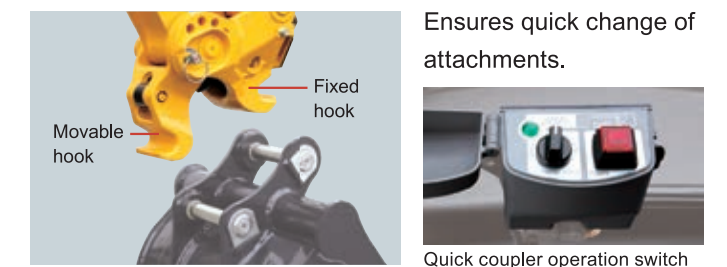

Ensures quick change of attachments.

Quick coupler operation switch


UNIVERSAL DESIGN (UD), COMFORT

Comfort

The universal design employed to enhance operator comfort.



UD cabin and canopy provides maximum space

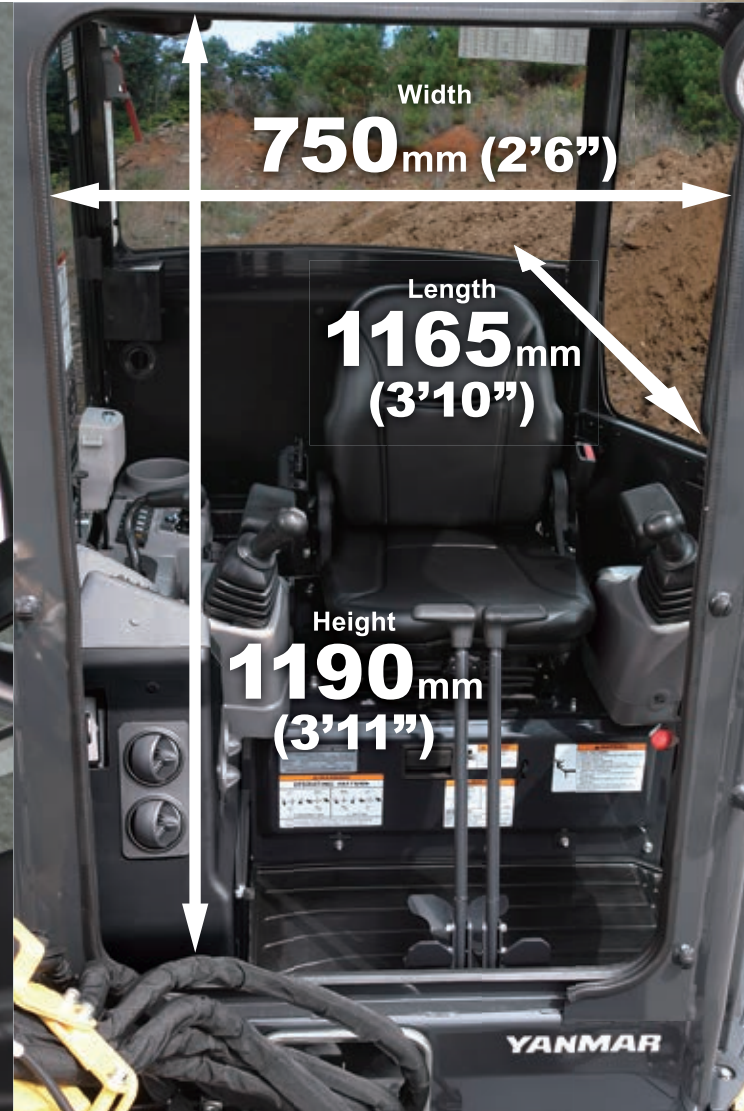

Width
750 mm (2'6")

Length
1165 mm (3'10")

Height
1190 mm (3'11")

Powerful air conditioner with features of air recirculation and fresh air mode

Air cooling **10%** improved



Comfortable reclining seat with storage compartment



New universal grab handles


Cabin light



Hood handles Door handles



Ergonomically arranged operating controls and switches are within the reach of one hand

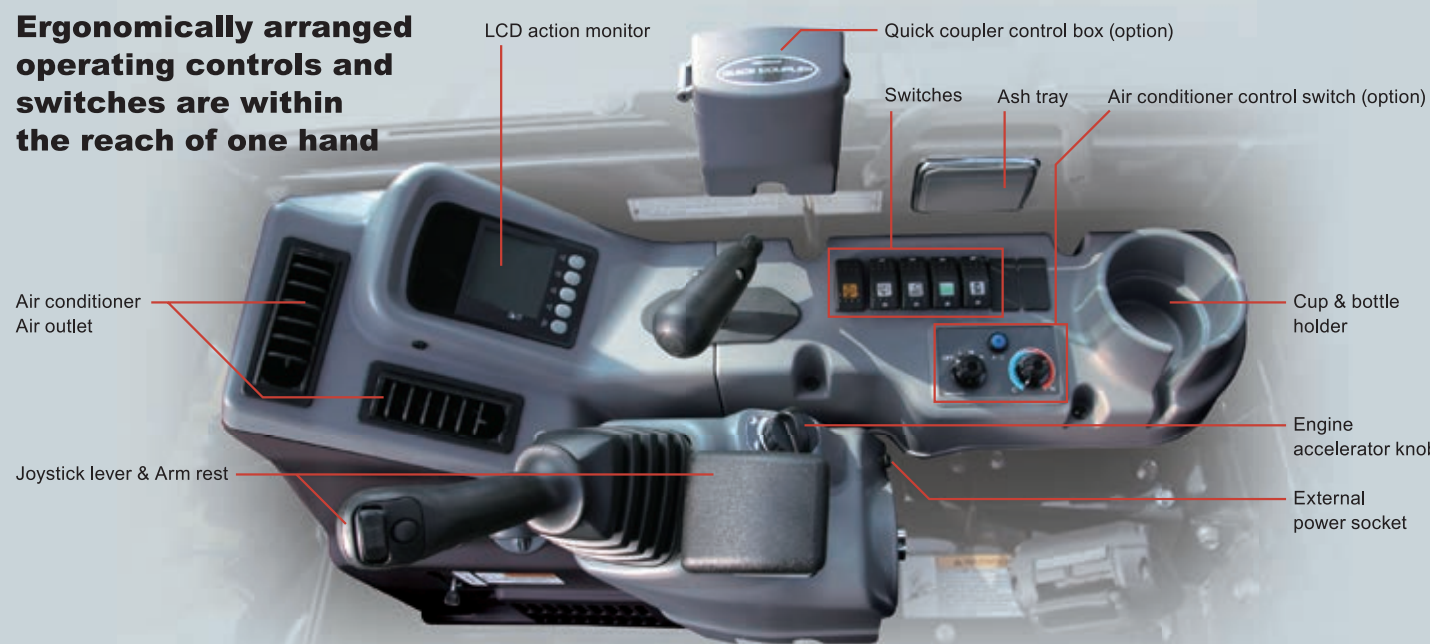

LCD action monitor

Quick coupler control box (option)

Switches

Ash tray

Air conditioner control switch (option)

Air conditioner Air outlet

Cup & bottle holder

Joystick lever & Arm rest

Engine accelerator knob

External power socket

Flat and spacious leg room



515 mm (1'8")




PROVEN DURABILITY AND SAFETY

Simple design and durable components for enhanced reliability and minimum running costs.

1 Cylinder guard protectors made from strong spring steel

2 Tough and lighter boom

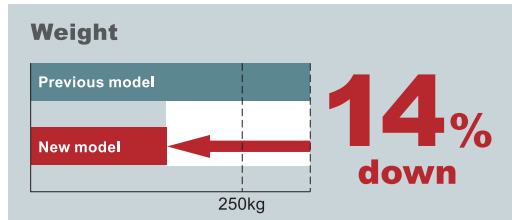

3 Protected work light

4 Perfectly located air conditioner condenser

5 Steel bonnets ensure extra component protection

6 Strengthened bonnet hinges



Rear hood Right hood Right upper hood

7 Frame guard provides protection on the toughest job sites

8 Upgraded undercarriage

A Idler / Held with double pin to prevent oil leakage.

Width **25% size up**

B Track roller / New durable structure

prevents dirt or mud from sticking. **13% size up**

Diameter **14% size up**


C Sprocket / Durable and long lasting.

Width **29% size up**



9 Cabin & Canopy comply with ROPS and FOPS ISO standards

10 Safety lock levers

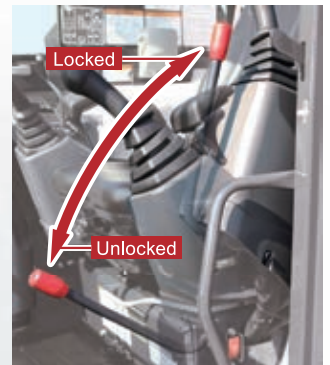

11 Emergency engine stop switch




12 Seat belt



13 Evacuation hammer (cabin spec)



14 Back mirror

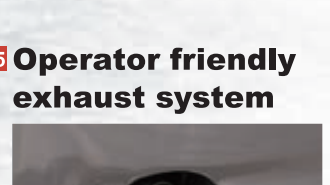

15 Operator friendly exhaust system






EASY MAINTENANCE

Maintenance

The new LCD action monitor provides various information, including machine service life and servicing alerts for smart machine maintenance.

Back light large-screen LCD monitor


ViO50-6B and ViO55-6B incorporate a system that allows tracking down machine operating conditions over a span of 3 months.

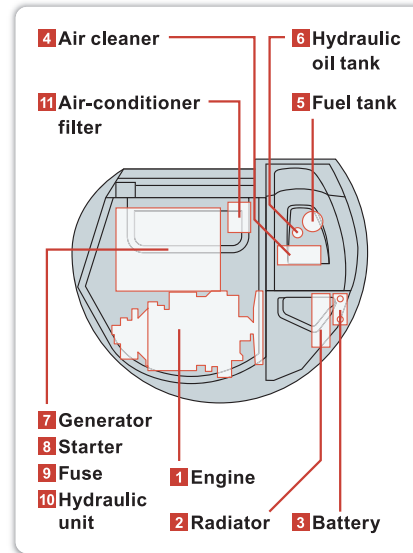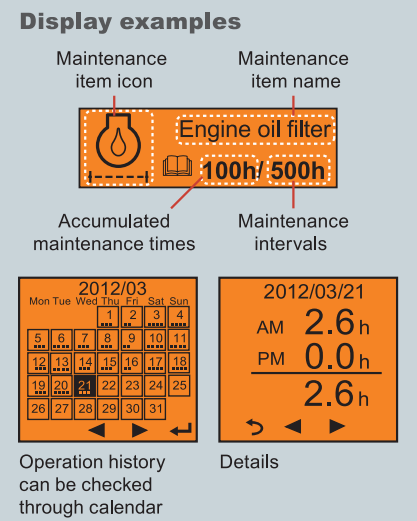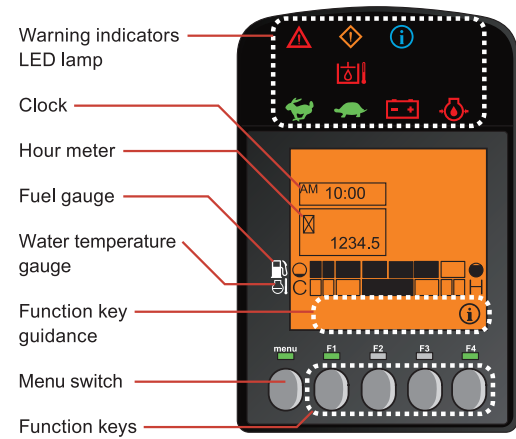

Rear hood, right hood open without tools






Right upper opens without tools

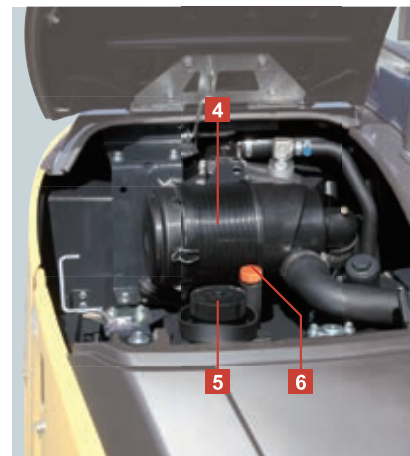

Open around the operator's seat



Easy maintenance of air conditioner

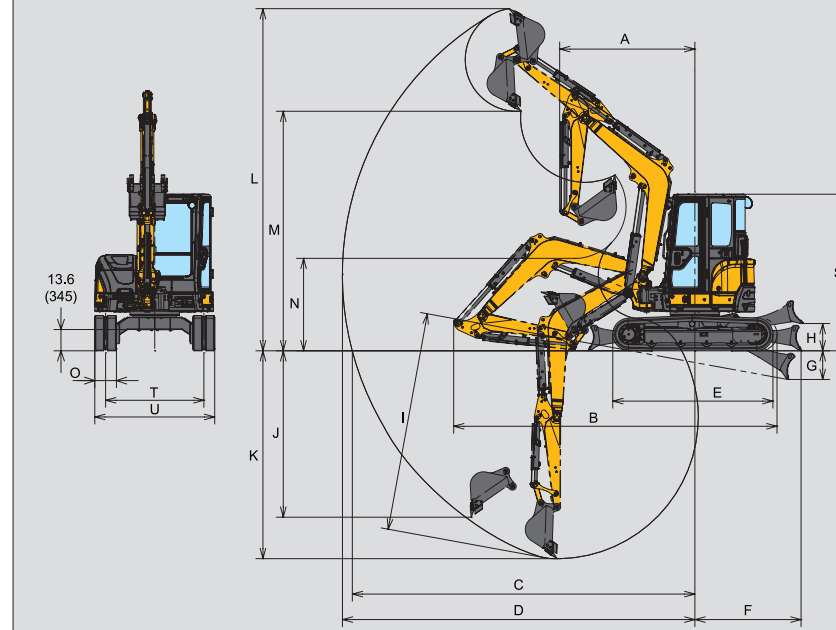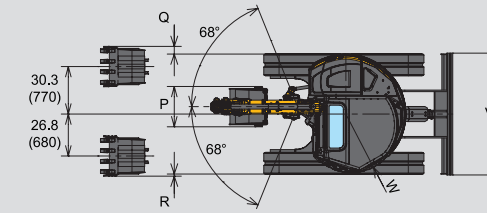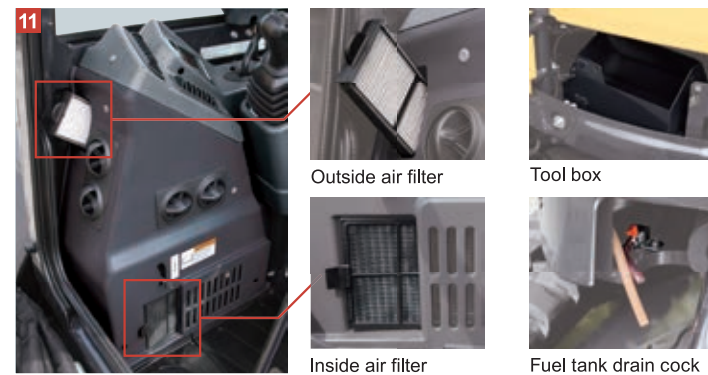

Dimensions

Unit : mm (in)

	ViO50-6B		ViO55-6B	
	Canopy spec / Cabin spec	Canopy spec / Cabin spec	Canopy spec / Cabin spec	Canopy spec / Cabin spec
	Quick coupler	without Quick coupler	Quick coupler	without Quick coupler
A	2380 (93.7) Swing 2120 (83.5)	2190 (86.2) Swing 1950 (76.8)	2370 (93.3) Swing 2110 (83.1)	2180 (85.8) Swing 1940 (76.4)
B	5320 (209.4)	5230 (205.9)	5580 (219.7)	5510 (216.9)
C	5740 (226.0)	5540 (218.1)	6140 (241.7)	5950 (234.3)
D	5890 (231.9)	5700 (224.4)	6290 (247.6)	6100 (240.2)
E	2590 (102.0)			
F	1890 (77.4)	1720 (67.7)	1890 (77.4)	1720 (67.7)
G	540 (21.3)	465 (18.3)	540 (21.3)	465 (18.3)
H	500 (19.7)	445 (17.5)	500 (19.7)	445 (17.5)
I	3740 (147.2)	3540 (139.4)	4120 (162.2)	3920 (154.3)
J	2380 (93.7)	2690 (105.9)	2560 (100.8)	2930 (115.4)
K	3550 (139.8)	3360 (132.3)	3900 (153.5)	3710 (146.1)
L	5700 (224.4)	5530 (217.7)	6060 (238.6)	5900 (232.3)
M	3680 (144.9)	3870 (152.4)	4050 (159.4)	4240 (166.9)
N	1340 (52.8)	1500 (59.1)	1410 (55.5)	1570 (61.8)
O	350 (13.8)		400 (15.7)	
P	650 (25.6)		700 (27.6)	
Q	125 (4.9)			
R	35 (1.4)			
S	2540 (100.0)			
T	1590 (62.6)			
U	1940 (76.4)		1990 (78.3)	
V	1970 (77.6)		1970 (77.6)	
W	970 (38.2)		995 (39.2)	

Specifications

Model	ViO50-6B				ViO55-6B				
	Canopy		Cabin		Canopy		Cabin		
Spec	Quick coupler	without Quick coupler	Quick coupler	without Quick coupler	Quick coupler	without Quick coupler	Quick coupler	without Quick coupler	
Operating weight	Rubber track kg (lbs)	4705 (10373)	4605 (10152)	4875 (10748)	4775 (10527)	5355 (11806)	5255 (11585)	5535 (12203)	5435 (11982)
	Steel track kg (lbs)	4835 (10659)	4735 (10439)	5005 (11034)	4905 (10814)	5385 (11872)	5285 (11651)	5565 (12269)	5465 (12048)
Engine	Type	Vertical four cylinder water-cooled direct injection diesel engine							
	Model	YANMAR 4TNV88-ZPBV				YANMAR 4TNV84T-ZMBV			
	Rated output kW (hp) / rpm	28.1(37.7) / 2200 [Gross]				33.4 (48.4) / 2200 [Gross]			
Performance	Bucket capacity, standard (ISO heaped) cu.m (cu.ft)	0.14 (4.94)				0.16 (5.65)			
	Bucket width, standard (ISO heaped) mm (in.)	650 (25.6)				700 (27.6)			
	Max digging force, bucket kN (lbf)	28.9 (6497)	36.5 (8206)	28.9 (6497)	36.5 (8206)	33.2 (7464)	41.9 (9419)	33.2 (7464)	41.9 (9419)
	Traveling speed, Rubber track km/h (MPH)	4.6 (2.9) / 2.4 (1.5)				4.2 (2.6) / 2.2 (1.4)			
	high / low Steel track km/h (MPH)	4.3 (2.7) / 2.1 (1.3)				3.9 (2.4) / 2.0 (1.2)			
	Swing speed rpm	10				10			
	Boom swing angle, (L / R) degrees	68 / 68				68 / 68			
Ground contact pressure	Rubber track kPa (PSI)	29.3 (4.25)	28.7 (4.16)	30.4 (4.41)	29.8 (4.32)	29.2 (4.24)	28.6 (4.15)	30.2 (4.38)	29.6 (4.29)
	Steel track kPa (PSI)	30.5 (4.42)	29.9 (4.34)	31.6 (4.58)	31.0 (4.50)	29.7 (4.31)	29.2 (4.24)	30.7 (4.45)	30.2 (4.38)
Hydraulic system	Pump capacity L / min (GPM)	42.5 (11.2) x 2 [Variable displacement pump] 37.0 (9.8) x 1, 10.8 (2.9) x 1 [Gear pump]				45.8 (12.1) x 2 [Variable displacement pump] 37.0 (9.8) x 1, 10.8 (2.9) x 1 [Gear pump]			
	Main relief set pressure MPa (PSI)	24.5 (3553) x 2	21.6 (3133) x 1	3.9 (566) x 1	3.9 (566) x 1	24.5 (3553) x 2	24.5 (3553) x 1	3.9 (566) x 1	3.9 (566) x 1
Fuel tank capacity	L (Gals)	66 (17.4)				66 (17.4)			

Hydraulic PTO

Model	ViO50-6B				ViO55-6B			
	Output	L / min (GPM)		L / min (GPM)				
MPa (PSI)		2200RPM	1200RPM	MPa (PSI)	2200RPM	1200RPM		
Combined flow, double actions	24.5 (3553)	79.5 (21.0)	43.3 (11.4)	24.5 (3553)	82.8 (21.9)	45.1 (11.9)		